

# {Classification Level}


|             |                  |                        |         |                 |        |
|-------------|------------------|------------------------|---------|-----------------|--------|
| EUT:        | XYZ Widget       | Test ID:               | ER-RS1A | Combined Rd/RT? | No     |
| Test Date:  | 2/23/2017        | Red Signal #:          | RS1A    | Test Type:      | Rd     |
| Tested By:  | John Doe         | Media (ER, BLC):       | ER      | Category:       | B      |
| Charge No.: | N/A              | Level (I, II, or III): | II      | Rd Rate:        | 1 kbps |
| Mode:       | EUT On in Mode A | Signal Class:          | 2       | Rt Rate:        | N/A    |

## Table of CE

| Frequency (MHz) | Receiver Bandwidth (MHz) | Signal Generator (dBm) | 30% AM Factor (dB) | Transducer Correction Factor (dB) | Cable Loss (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Delta Above Limit (dB) |
|-----------------|--------------------------|------------------------|--------------------|-----------------------------------|-----------------|--------------------------|----------------|------------------------|
| 10              | 0.05                     | -82                    | -10                | 6.2                               | 0.1             | 21.3                     | 20.0           | 1.3                    |
| 62              | 0.05                     | -83                    | -10                | 14.9                              | 0.3             | 29.1                     | 35.8           | -6.7                   |
| 149             | 0.05                     | -87                    | -10                | 7.2                               | 0.4             | 17.6                     | 43.5           | -25.9                  |
| 225             | 0.05                     | -60                    | -10                | 6.8                               | 0.5             | 44.3                     | 47.0           | -2.8                   |

## Table of DRE

| Frequency (MHz) | Receiver Bandwidth (MHz) | Signal Generator (dBm) | 30% AM Factor (dB) | Transducer Correction Factor (dB) | Cable Loss (dB) | Corrected Level (dBuV/m) | Limit (dBuV/m) | Delta Above Limit (dB) |
|-----------------|--------------------------|------------------------|--------------------|-----------------------------------|-----------------|--------------------------|----------------|------------------------|
| 25              | 0.05                     | -70                    | -10                | 8.5                               | 0.2             | 35.7                     | 28.0           | 7.7                    |
| 250             | 0.05                     | -83                    | -10                | 4.9                               | 0.5             | 19.4                     | 48.0           | -28.6                  |
| 280             | 0.05                     | -87                    | -10                | 7.6                               | 0.5             | 18.1                     | 48.9           | -30.9                  |
| 300             | 0.05                     | -60                    | -10                | 9.2                               | 0.5             | 46.7                     | 49.5           | -2.8                   |

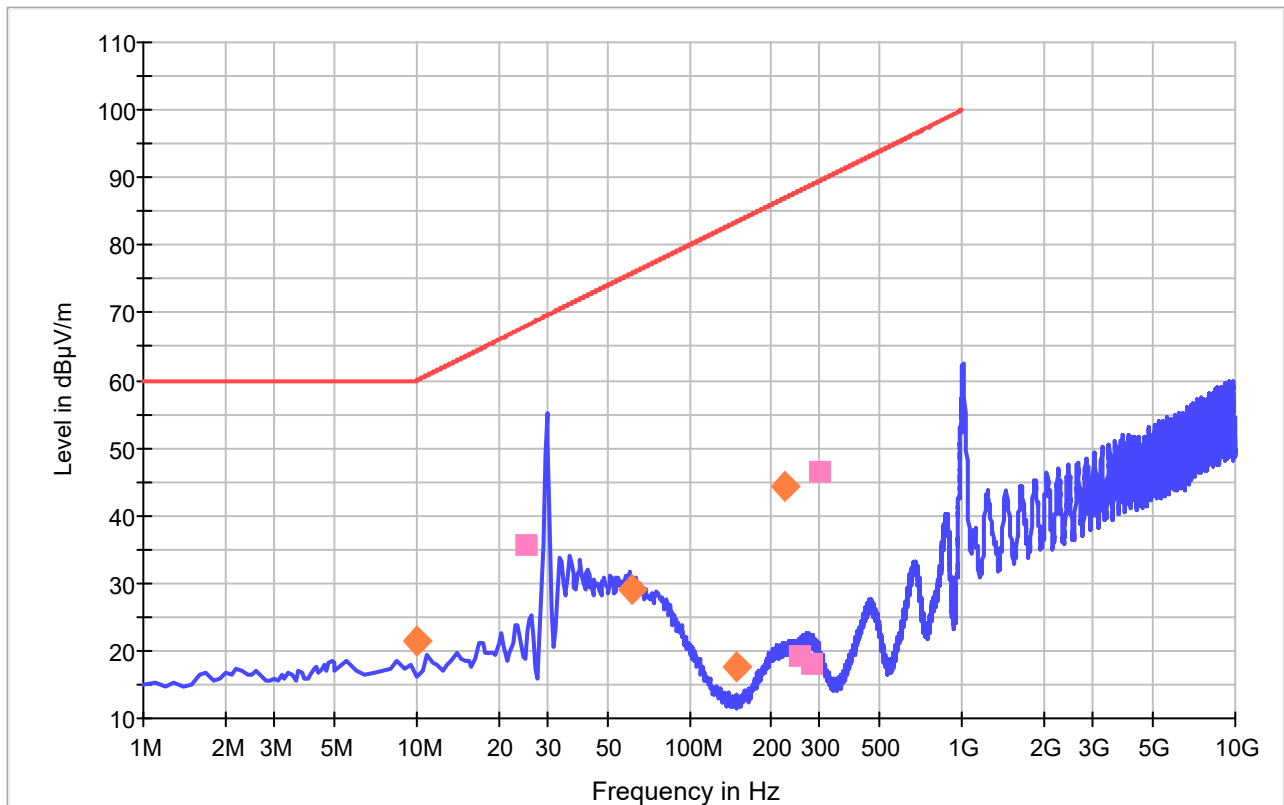

— ACV\_sine   
 — ERIIF   
 ◆ ER\_1Mbps\_Rd\_CE\_Level   
 ■ ER\_1Mbps\_Rd\_DRE\_Level

# {Classification Level}